

MAXIWASH

WASHING SOLUTIONS - LSI SERIES

HARD MOUNTED WASHING MACHINE MWLSI 25 LB

IM11 - advanced UX and UI

New IM11 graphic layout for more operator-machine interaction.

Balanced water fill

Hot and cold water mixed during filling phase for energy saving.

Security

Requires floor fixing (fischer included).



360° management

Wi-fi monitoring of the washing cycles through IM11, I'M CONNECT portal and App.

Better ergonomics

Black control panel tilted to for better visibility.

AISI 304 stainless steel structure

STAINLESS STEEL front, sides, top, drum, spider and outer drum.



OPTIONS and ACCESSORIES

- Prepped for 11 peristaltic pumps for liquid detergent
- Up to 6 x 30 lt/h pumps including flush + lance + tank end signal
- Drain pump kit
- Left-hand door opening
- Hard water inlet
- Second exhaust valve (for recovery circuit)
- Payment systems for coin-op use



Company Certified ISO 9001
(NR. CERT-00663-95-AQ-VEN-SINCER)



The images are to be considered purely indicative of the actual product

TECHNICAL DATA

MWLSI-25

- Capacity 1:9 - 1:10	12 - 11 Kg (26.4 - 24.2 lb)
- Drum diameter Ø	535 mm (21 inch.)
- Drum depth	470 mm (18.5 inch.)
- Drum volume	105 lt
- Load diameter Ø	282 mm (11.1 inch.)
- Spin speed	535 r.p.m.
- G Factor	85
- Air sound intensity	65 dB (A)
- Heating leakage	5 %
- Dynamic load (frequency)	2519 N (8.9 Hz)
- Cold water consumption*	68 l (2.4 ft³)
- Hot water consumption*	20 l (0.7 ft³)
- Water consumption*	88 l (3.1 ft³)
- Drain flow	160 lt/min (5.6 ft³/min)
- Machine dimension WxDxH (100 mm = 3.93 inch.)	720x933x1087 mm
- Net weight	207 Kg (582 lb)
- Packing dimension WxDxH** (100 mm = 3.93 inch.)	760x1040x1200 mm
- Gross weight	215 Kg (608.5 lb)
- Packaging volume	0,95 mc (33.6 ft³)
- STD. packed machines in to 20' container	16 pz.
- STD. packed machines in to 40' container 40' H.C.	34 - 68 pz. stackable

DATA BY TYPE OF HEATING

- Electrical Heating	9 kW
- Consumption*	1,5 kWh
- Electric absorption (50/60Hz)	10,5 kW
- 3ph400V-480V(+N) / 3ph230V / 1ph230V	16 / 25 / 42 A
- Steam heating consumption*	0,2 Kg (0.4 lb)
- Electric consumption*	0,8 kWh
- Electric absorption (50/60Hz)	1,5 kW
- 3ph400V-480V(+N) / 3ph230V / 1ph230V	- / - / 3 A

* Cycle "Cotton" 60° C - EN60456, tab. A2

** The packaging dimensions Include the conterframe (if present)

Pos. 1 - Cold water 3/4" - Press. 0,5 ÷ 10 bar

Pos. 2 - Hot water 3/4" - Press. 0,5 ÷ 10 bar



Pos. 3 - Steam inlet 3/4" Press. 0,3 ÷ 9 bar

Pos. 4 - Drain valve Ø 50 mm (2 inch.)

Pos. 5 - Air vent Ø 50 mm (2 inch.)




Pos. 6 - Electrical power supply

Pos. 9 - Detergent load

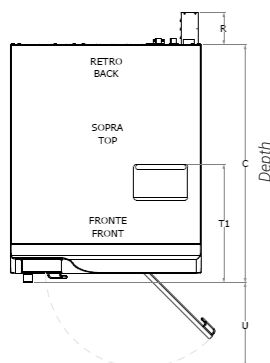

NO CONTROTELAIO
FISSAGGIO CON TASSELLI

NO FRAME
FIXING WITH BOLTS

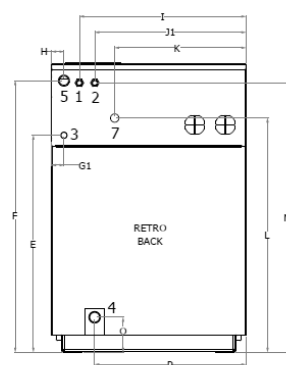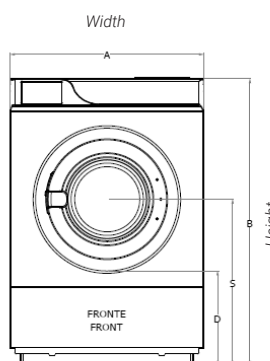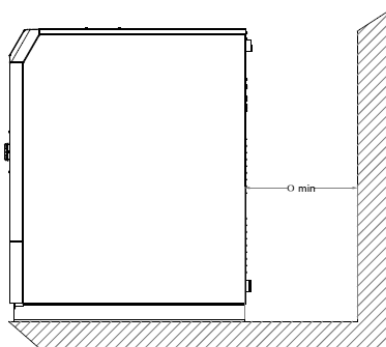

100 mm = 3.93 inch. - factor conversion 1 / 25,4

[mm]	A	B	C	D	E	F	G	H	I	J1	K	L	M1	O	P	Qmin	R	S	T1	U	V1	W	X1	Z1	Z2
MWLSI -25	720	1087	933	334	765	1014	52	62	555	315	495	762	1033	76	560	600	150	555	490	421	610	204	647	55	75

MAXIWASH